


PRODUCT DATASHEET

LVCOB PFM-040-1206

COB LED PERFORMANCE 40W 1206

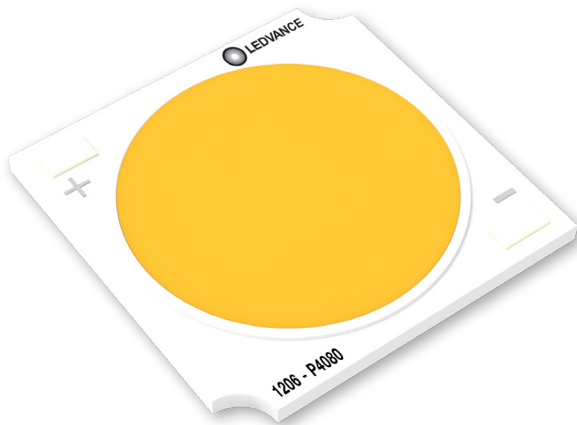

AREAS OF APPLICATION

- Tracking Light
- Spot Light
- Par Light
- Bulb Light
- Down Light

PRODUCT BENEFITS

- High color quality, high-flux, high-efficacy
 - Low thermal resistance
 - Easy for assemble
 - Long lifetime
 - RoHS compliant
 - Available white chromaticity bins form ANSI
-

TECHNICAL DATA


Electrical and Thermal Characteristics

Item	Symbol	Min	Max	Unit
Forward Current	IF	/	1080	mA
Forward Voltage	VF	31.2	36.9	V
Operating Temperature	Topr	-40	+105	°C
Storage Temperature	Tstg	-40	+120	°C
Soldering Temperature	Tsol	/	350	°C
Junction Temperature	Tj	/	150	°C
Case Temperature	Tc	/	105	°C
Thermal Resistance	Rj-c	/	0.6	°C/W
Antistatic Ability	ESD	2000	/	V

The using temperature is less than 105°C; please reduce the using current or contact with us if using temperature is more than 105°C.

When hand soldering,keep the temperature of iron below less 350°C less than 5 seconds.

Chromaticity Coordinate Groups

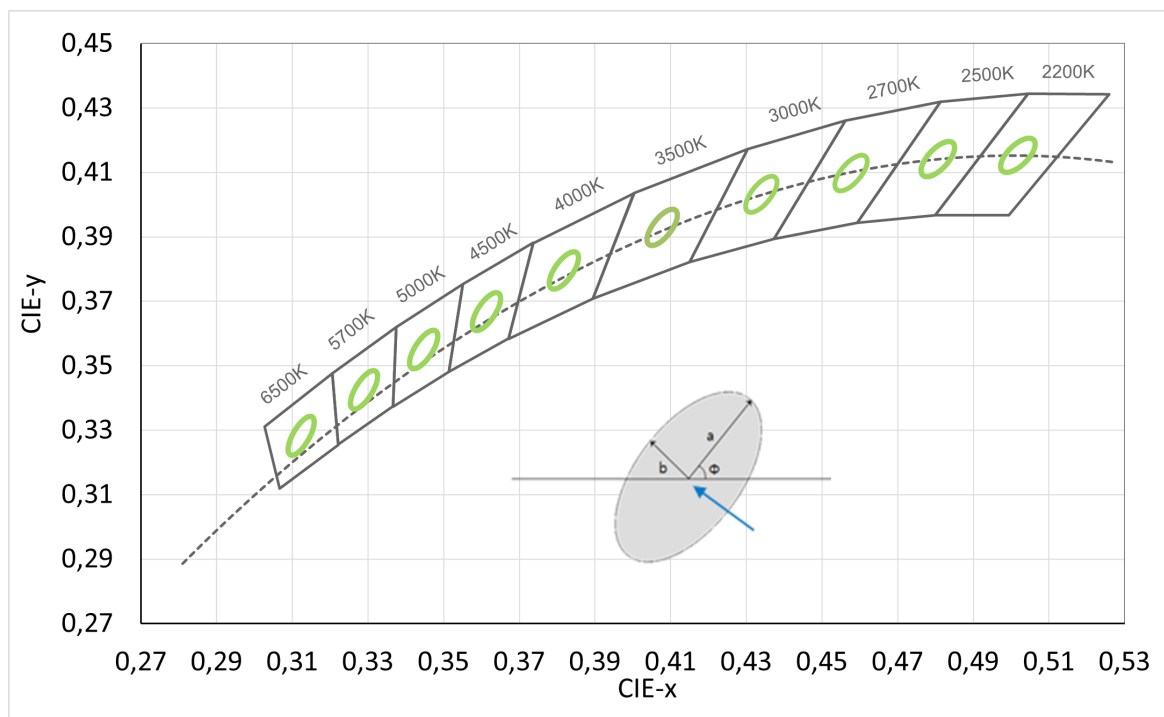

Standard Type	ANSI/A		2-step		3-step		θ
	Center Point	CIE-X	CIE-Y	a	b	a	
2200K	0.5018	0.4153	0.0050	0.0028	0.0075	0.0042	52.78
2500K	0.4806	0.4141	0.0052	0.0028	0.0078	0.0042	53.10
2700K	0.4578	0.4101	0.0054	0.0028	0.0081	0.0042	53.42
3000K	0.4339	0.4033	0.0056	0.0027	0.0083	0.0041	53.13
3500K	0.4078	0.3930	0.0063	0.0028	0.0095	0.0042	52.58
4000K	0.3818	0.3797	0.0063	0.0027	0.0094	0.0040	53.43
4500K	0.3613	0.3670	0.0059	0.0025	0.0088	0.0038	56.4
5000K	0.3446	0.3551	0.0055	0.0024	0.0082	0.0035	59.37
5700K	0.3287	0.3425	0.0050	0.0021	0.0075	0.0032	58.86
6500K	0.3123	0.3283	0.0045	0.0019	0.0067	0.0029	58.34

LEDVANCE maintains chromaticity (x, y) ± 0.005 , color region stay within MacAdam 2-step ellipse from the chromaticity center.

The ANSI standard is A standard for short, reference standard is ANSI-C78.377-2015.

The using current should be consistent with the label, and chromaticity will change if working current is outside this range of the label.

Product Selection Guide

If=540mA Tj= 85°C

Product Code	CCT	CRI Min.	Luminous Flux (lm)		Efficacy (lm/w) Typ.	Voltage (V) Typ.
			Min.	Typ.		
LVCOB PFM-040-1206-P3070	3000K	70	2921	3107	169	34
LVCOB PFM-040-1206-P4070	4000K	70	3014	3207	174	34
LVCOB PFM-040-1206-P5070	5000K	70	3000	3191	173	34
LVCOB PFM-040-1206-P2780	2700K	80	2577	2742	149	34
LVCOB PFM-040-1206-P3080	3000K	80	2704	2877	156	34
LVCOB PFM-040-1206-P3580	3500K	80	2746	2921	159	34
LVCOB PFM-040-1206-P4080	4000K	80	2816	2996	163	34
LVCOB PFM-040-1206-P5080	5000K	80	2832	3013	164	34
LVCOB PFM-040-1206-P5780	5700K	80	2818	2998	163	34
LVCOB PFM-040-1206-P6580	6500K	80	2788	2966	161	34
LVCOB PFM-040-1206-P2790	2700K	90	2163	2301	125	34
LVCOB PFM-040-1206-P3090	3000K	90	2268	2413	131	34
LVCOB PFM-040-1206-P3590	3500K	90	2375	2526	137	34
LVCOB PFM-040-1206-P4090	4000K	90	2426	2581	140	34
LVCOB PFM-040-1206-P5090	5000K	90	2441	2596	141	34


The tolerance of measurement at our tester is voltage \pm 5%, luminous flux \pm 7% and Ra \pm 1.

Luminous flux inside the integrating sphere measurements. (Tj=Tc=85°C)


CHARACTERISTIC CURVES

Forward Current Characteristics

Forward Voltage vs Forward Current

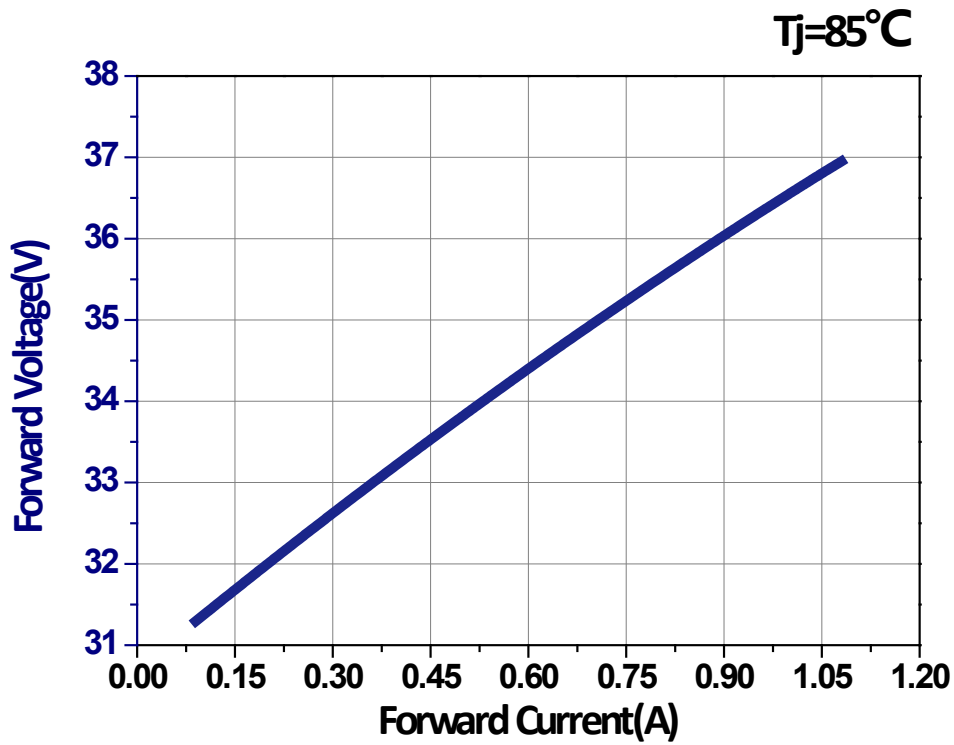


Forward Current vs Relative Luminous Flux

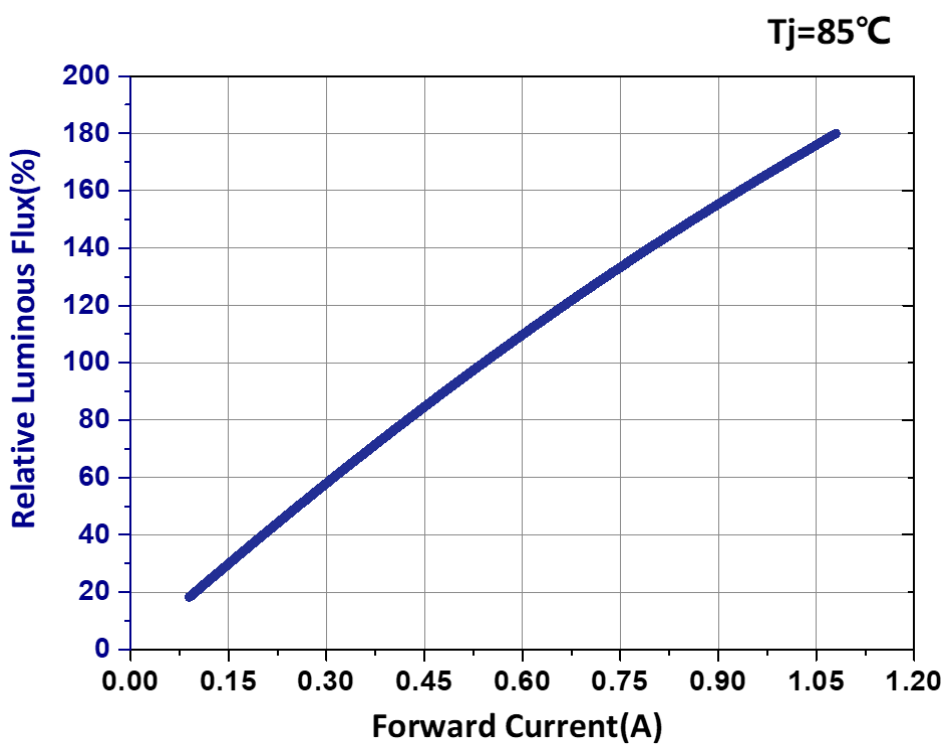


Temperature Characteristics

Relative Luminous Intensity vs Substrate Temperature $I_f=540\text{mA}$

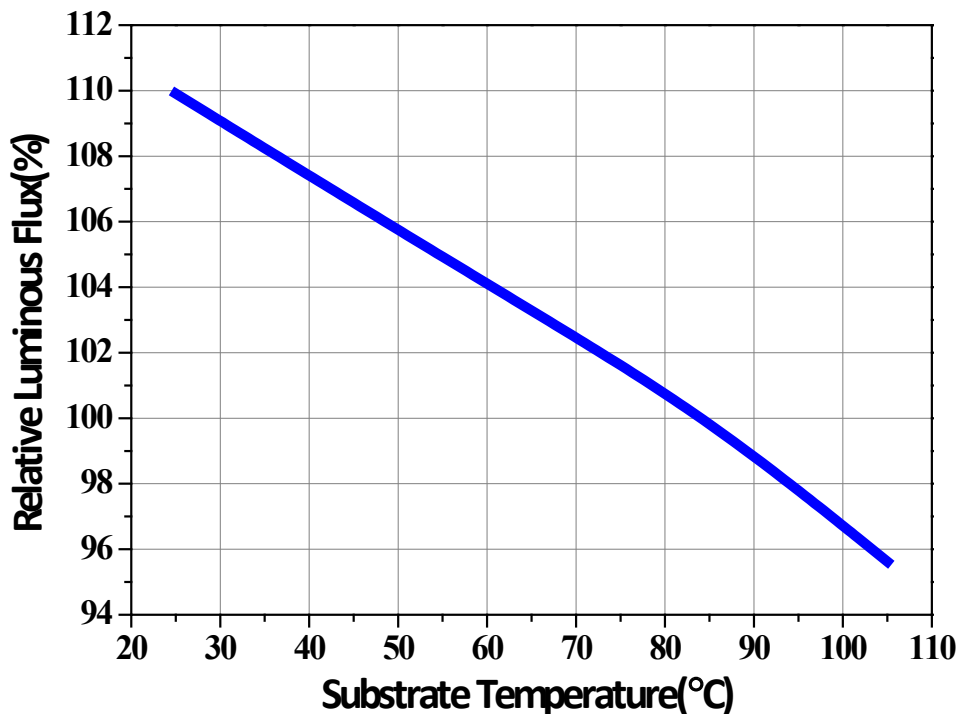


Forward Voltage vs Substrate Temperature $I_f=540\text{mA}$

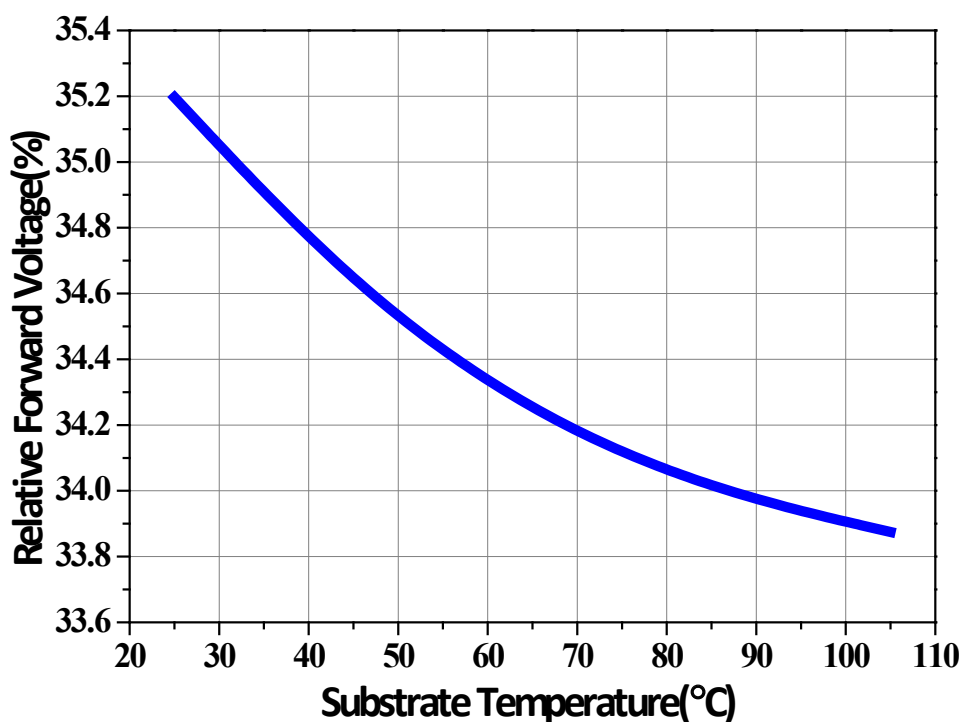


Color Shift Characteristics


$\Delta CIE_x, \Delta CIE_y$ vs Forward Current
CRI(Ra)=80 $T_j=85^\circ\text{C}$ $I_f=540\text{mA}$

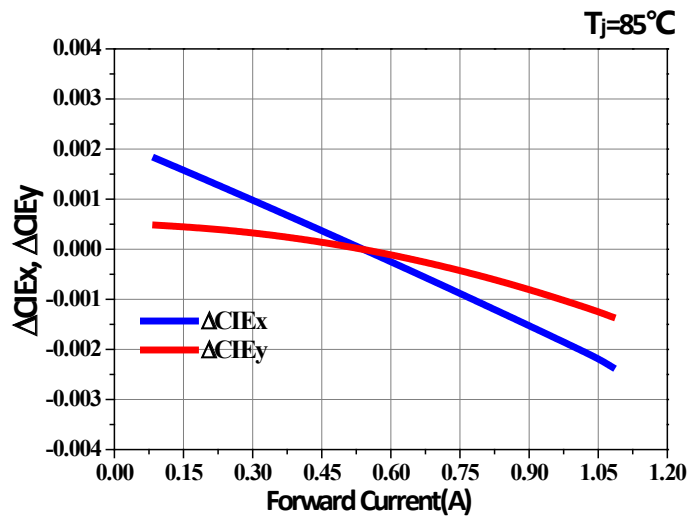


$\Delta CIE_x, \Delta CIE_y$ vs Substrate Temperature
CRI(Ra)=80 $T_j=85^\circ\text{C}$ $I_f=540\text{mA}$

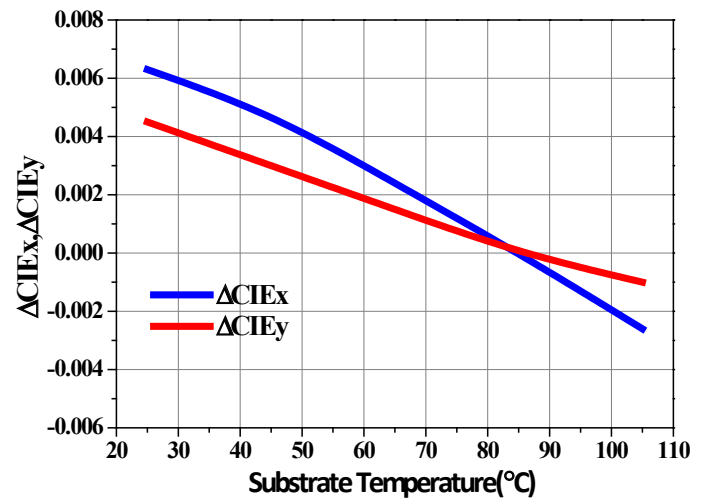

Radiation Angle

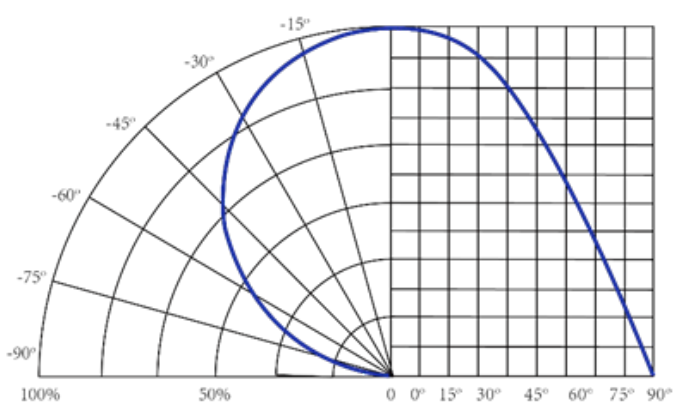

Maximum Forward Current vs Case Temperature Graph

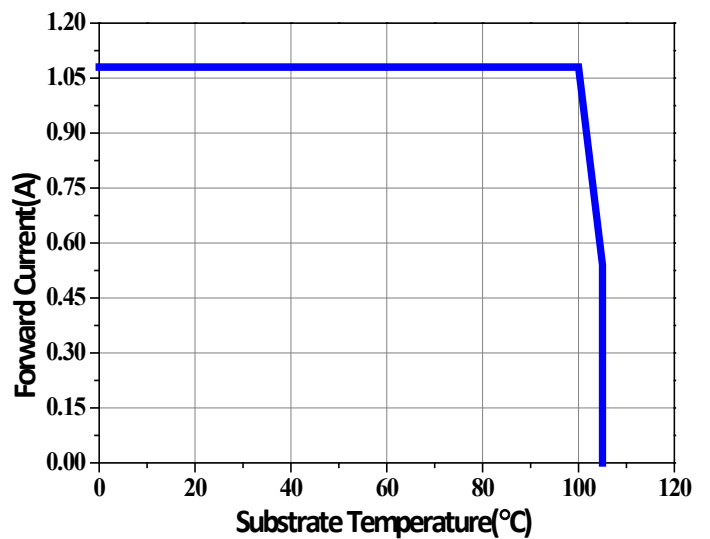


Spectrum Distribution


Relative Intensity vs Wavelength

T_j=85°C I_f=540mA

CRI(Ra) 70Min

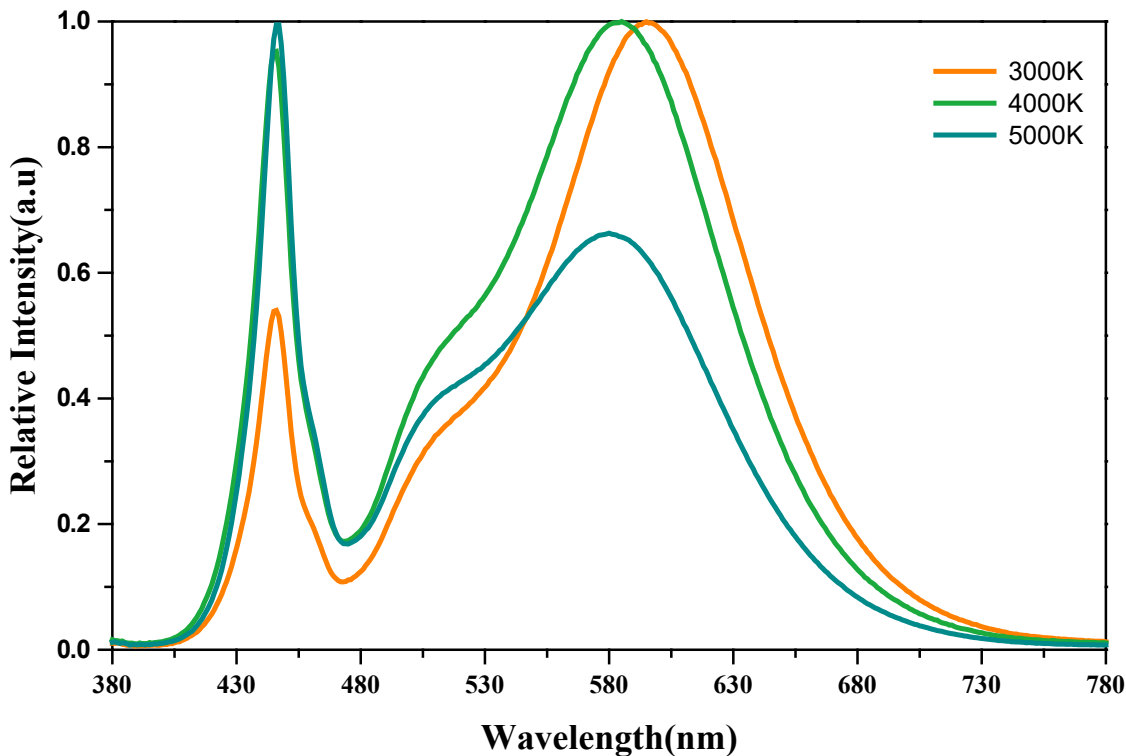


CRI(Ra) 80Min

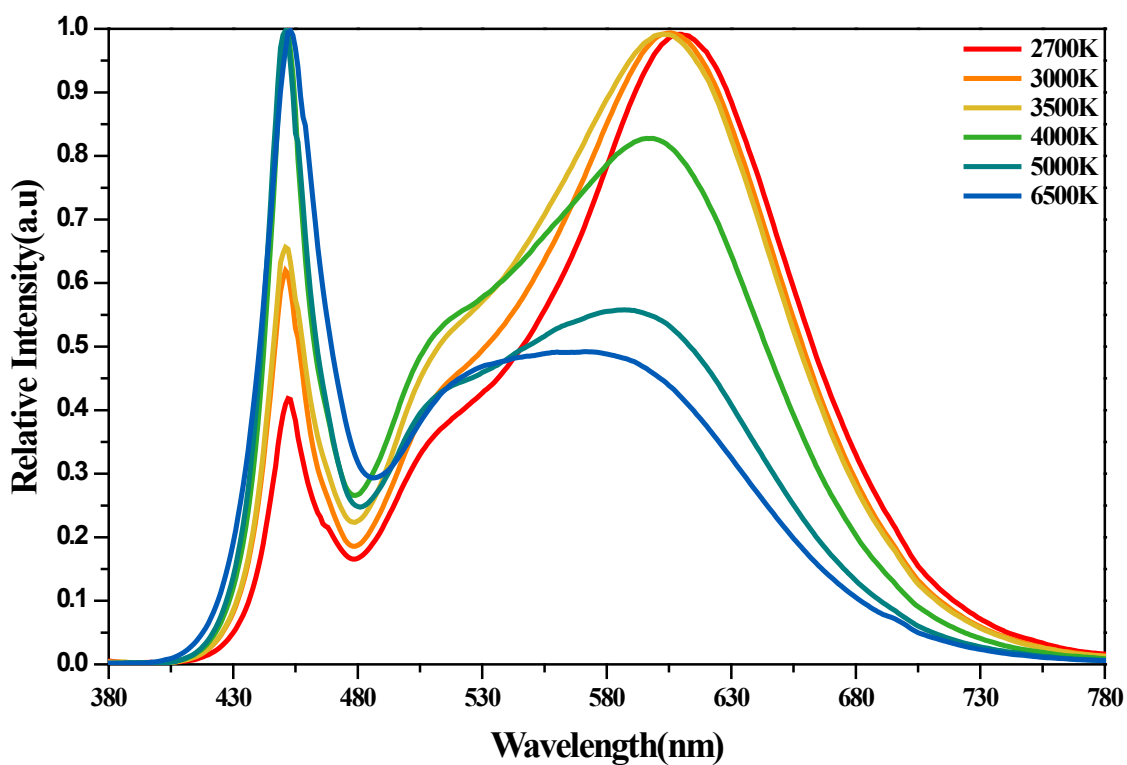


Characteristic Curves

Spectrum Distribution

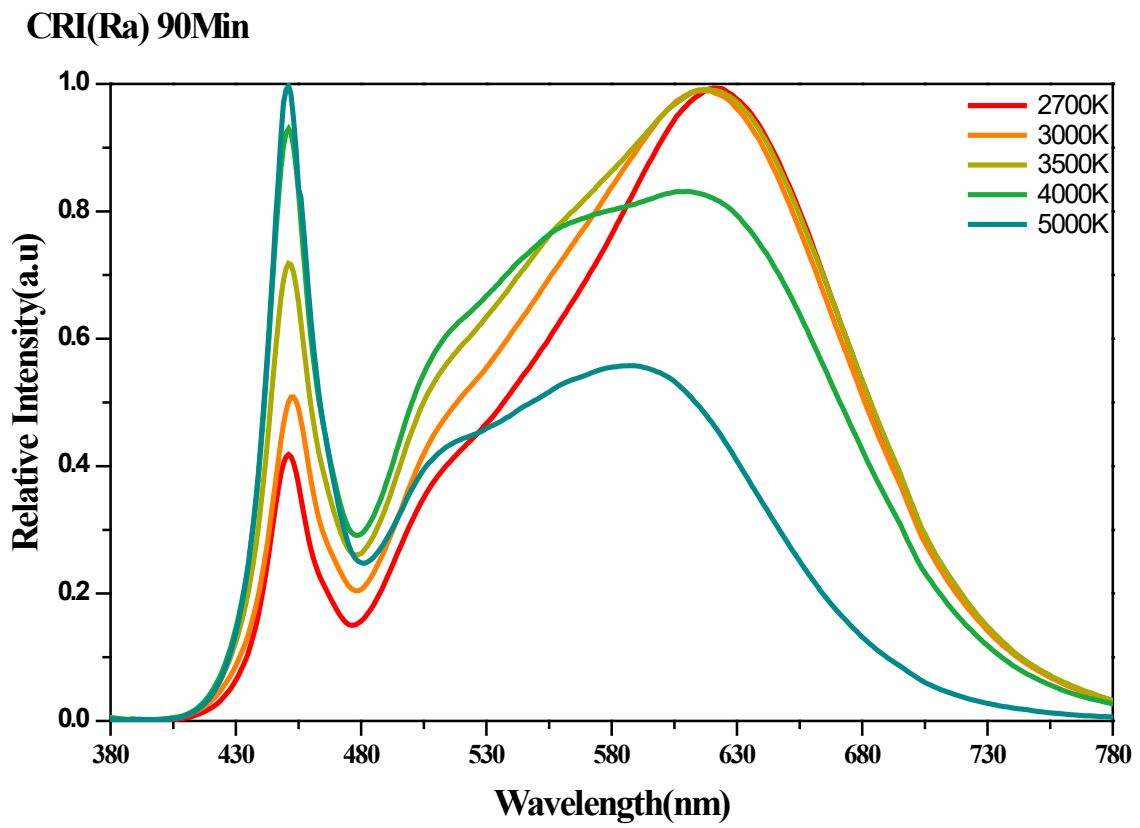


MECHANICAL DIMENSION

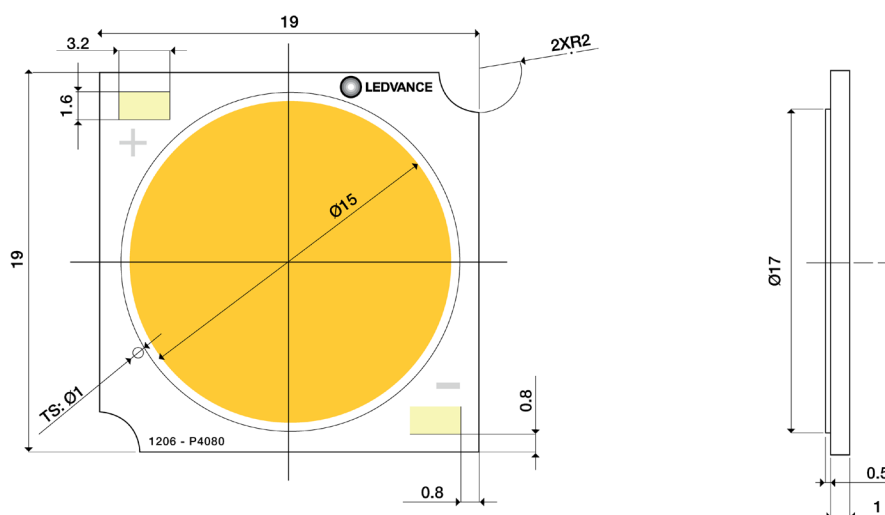

ENCODING

LVCOB - PFM - 040 - 1206 - P3070


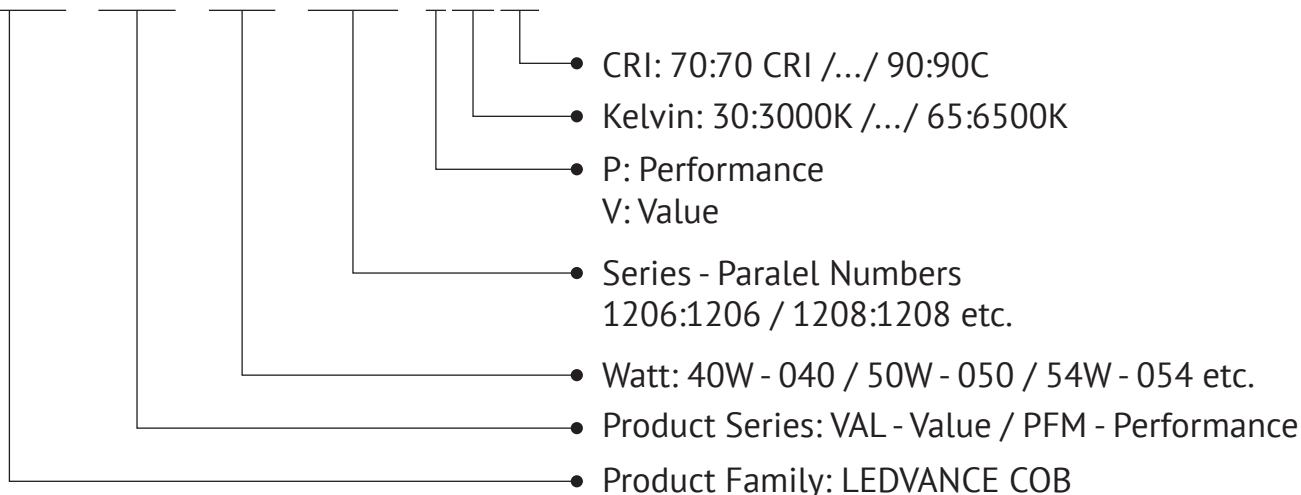


PACKING SPECIFICATION / EAN CODES

RoHS	Qty:XXX	
PN: LVCOB PFM-040-1206-P2780		
Des: COB LED PFM 40W 1206 2700K 80CRI		
If(mA):XXX	Vf(V):XX.X	Pi(W):XX
CCT(K):XXXX	Φ(lm):XXXX	Ra:XX
XXXXXXXXXX LotXXXXXXXXXX XXXX-XXXXXXXXXX		
Date: xx / xx / xxxx	www.ledvance.com	

Short Text	EAN10 1PC LED	EAN20 1 BAG - 125 PCS	EAN40 1 BOX - 500 PCS
LVCOB PFM-040-1206-P2780 4XBT125 TRLEDV	4058075690332	4058075690349	4058075690356
LVCOB PFM-040-1206-P3080 4XBT125 TRLEDV	4058075690363	4058075690370	4058075690387
LVCOB PFM-040-1206-P3090 4XBT125 TRLEDV	4058075690394	4058075690400	4058075690417
LVCOB PFM-040-1206-P4080 4XBT125 TRLEDV	4058075690424	4058075690431	4058075690448

MANNER OF PACKING

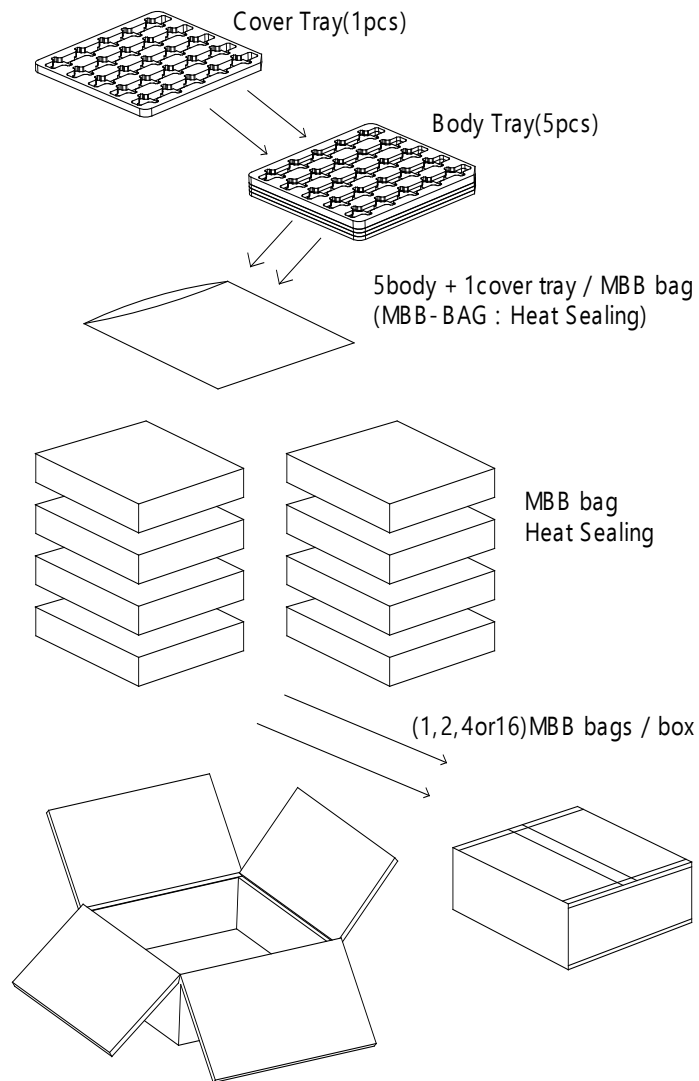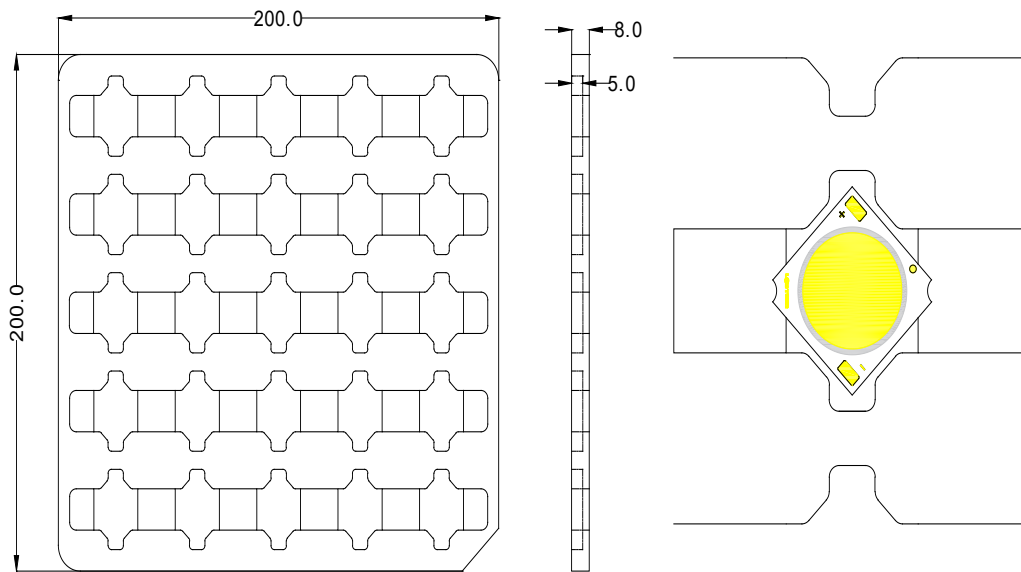

An empty tray is placed on top of a 5-tier tray which contain 25 PCS each.(Smallest packing unit:125 PCS)

A label whit product name,quantity and lot number is placed on the upper empty tray.(Tray Dimension:200*200*8 mm)

CAUTIONS

1. Storage

Store the parts in a dry, nitrogen-purged cabinet or container that actively maintains the temperature at 20°C-30°C and the RH at no greater than 60%.

2. Precautions for Use

By using anti-static-electricity bracelets/ cushions/ overalls/ shoes/gloves and anti-static-electricity containers, it can effectively prevent static electricity and surge. The soldering iron point should be properly grounded. Use soldering by hand: Soldering bit temperature shall be 350°C or less, Heating time: 5 seconds or less.

3. ESD Protection


You need to take the protective measures for the product being sensitive to static electricity. It can lead to product damage or even the total invalid when the high voltage current made by static electricity is beyond the maximum rating. The ground resistance can't beyond 10Ω.

4. Cleaning

Please do not make the thermal grease, oil exposed to the light-emitting surface, air gun can be used to remove dirt. Guns Pressure: 0.5MPa, Time: 1 to 2 seconds, Distance: more than 20cm.

5. Overcurrent Protection

Any time, don't press colloid part, lest product surface come to be damaged or even invalid. It is recommended to design PCB with ground circuit. Pay special attention to the use environment of the products: Humidity must be between 50% and 80%, or else electrostatic breakdown and overcurrent damage would occur. The use temperature is -40°C~105°C. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these data sheets. LEDVANCE assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these data sheets.

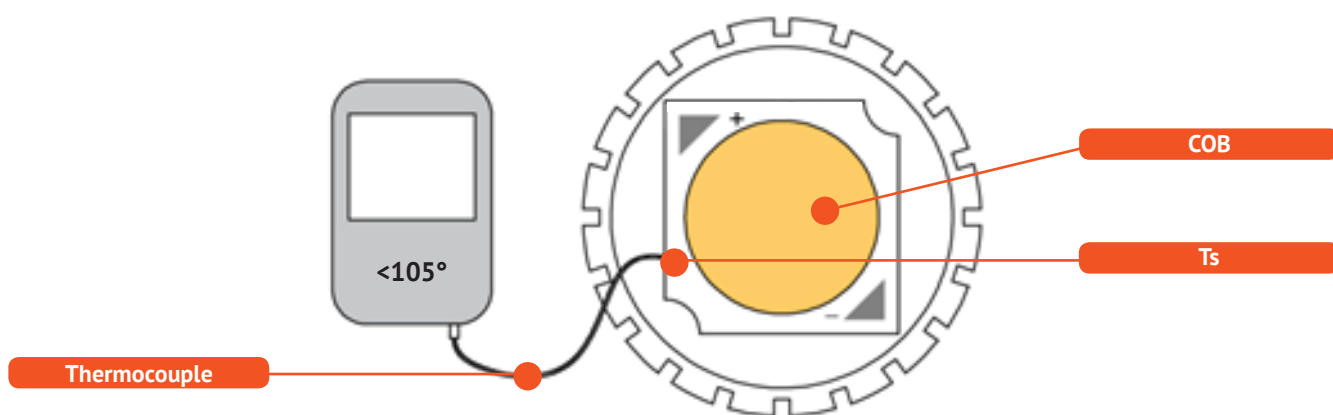

6. Thermal Design

The thermal design to draw heat away from the LED junction is most critical parameter for an LED illumination system. High operating temperatures at the LED junction adversely affect the performance of LED's light output and lifetime. Therefore the LED junction temperature should not exceed the absolute maximum rating in LED illumination system.

7. Safety Tips

During using this product, the country relative safety standards (eg. GB7000.1-2007) should be accorded with. We will not be liable for the users' acts of non-observance of the country safety standards.

Reminder: In order to protect the environment, please dispose the waste light according to the general waste

If you have any objection of this datasheet, please inform us in writing within 7 days, or it will be considered as accepting all the contents of this datasheet.